


SECTION ELEVATION B-B

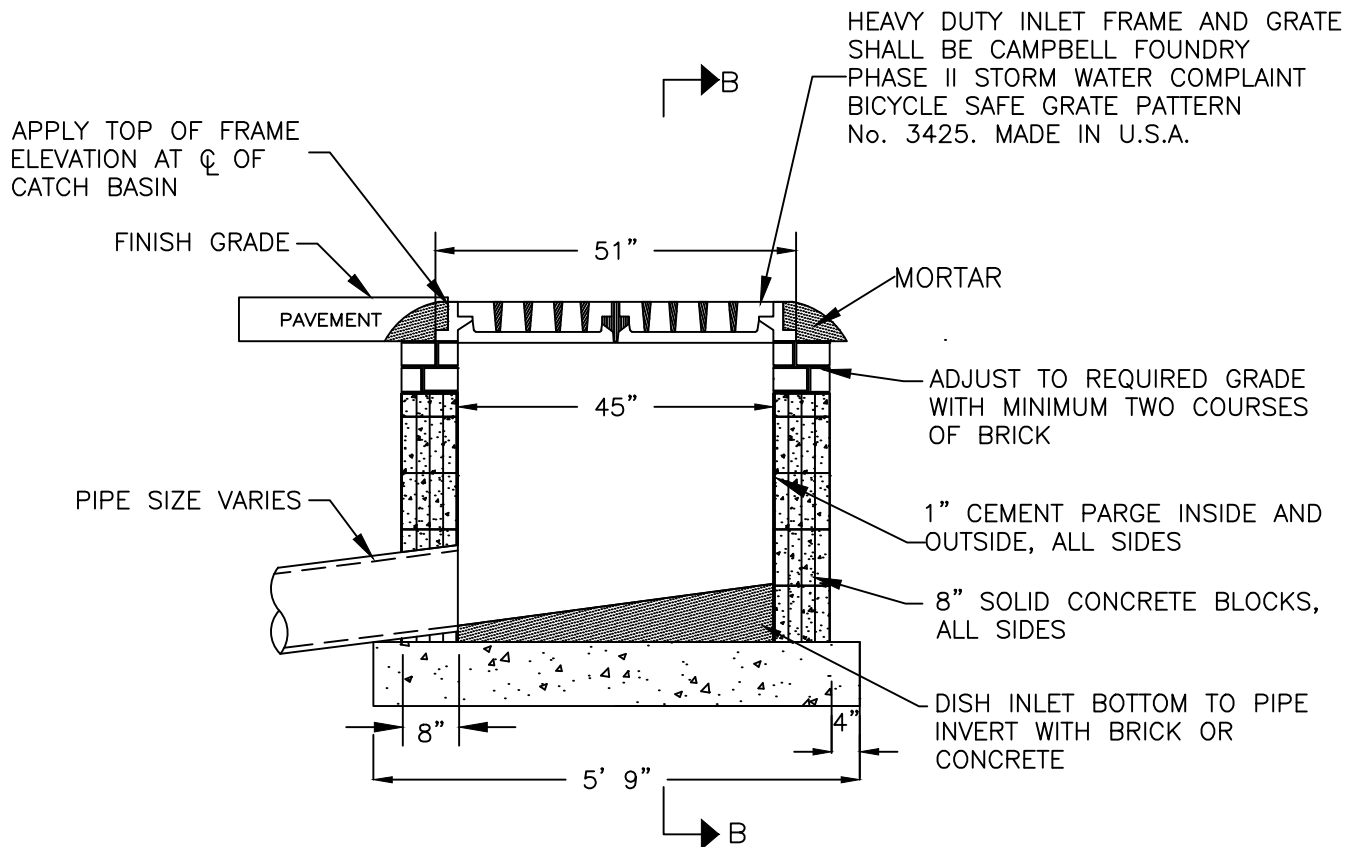

SECTION ELEVATION A-A

HEAVY DUTY INLET FRAME AND GRATE SHALL BE CAMPBELL FOUNDRY PHASE II STORM WATER COMPLAINT BICYCLE SAFE GRATE PATTERN No. 3425. MADE IN U.S.A.

APPLY TOP OF FRAME ELEVATION AT C OF CATCH BASIN

FINISH GRADE

PAVEMENT

MORTAR

ADJUST TO REQUIRED GRADE WITH MINIMUM TWO COURSES OF BRICK

1" CEMENT PARGE INSIDE AND OUTSIDE, ALL SIDES

8" SOLID CONCRETE BLOCKS, ALL SIDES

DISH INLET BOTTOM TO PIPE INVERT WITH BRICK OR CONCRETE

PIPE SIZE VARIES

NOTES:

1. DIMENSION "A" SHALL BE CONSISTENT WITH THE INVERT ELEVATION SHOWN ON CONTRACT DRAWINGS. WHEN NO INVERT ELEVATION IS SPECIFIED DIMENSION "A" SHALL BE ADEQUATE TO PROVIDE A MINIMUM OF 2'-0" OF COVER OVER PIPE.

SCALE = N.T.S.

STANDARD CONSTRUCTION DETAIL
DOUBLE TYPE "C-1" CURBLESS CONCRETE BLOCK INLET
TOWN OF GREENWICH, CONNECTICUT ENGINEERING DIVISION DEPARTMENT OF PUBLIC WORKS